Algorithms and Architecture I

Doubly Linked Lists in Practice

As in the Book

- Pointers to previous and next:

```
struct elem_t {
    struct elem_t *prev, *next;
    datatype_t key;
};
```

- Remove(e) (simplified):
  e->prev->next=e->next
  e->next->prev=e->prev

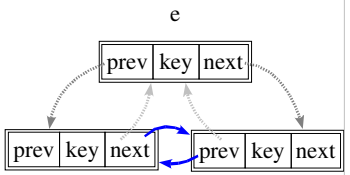

- Problem for the head because it is not a struct elem_t.



Often in Practice

- Different pointers:

```
struct elem_t {
    struct elem_t **prev, *next;
    datatype_t key;
};
```



- Remove(e) (simplified):
  *e->prev=e->next
  e->next->prev=e->prev



- No special case for the head of the list.